


## PASSIVE STRAIGHTENER BR/ED/9/130/25

### Passive straightener for strip material

#### Construction and handling

- Solid straightener, mounted on rigid base plate.
- All straightening rolls are hardened and grinded
- Pneumatic lifting of the upper straightening rolls
- Upper straightening rolls adjustable by 2 hand wheels, reading of the penetration depth by 2 mechanical dials (Precisions  $\pm 0.01$  mm)
- Lateral strip guiding device at the inlet adjustable by hand wheel
- Down holding of the strip by 2 hardened and grinded rolls

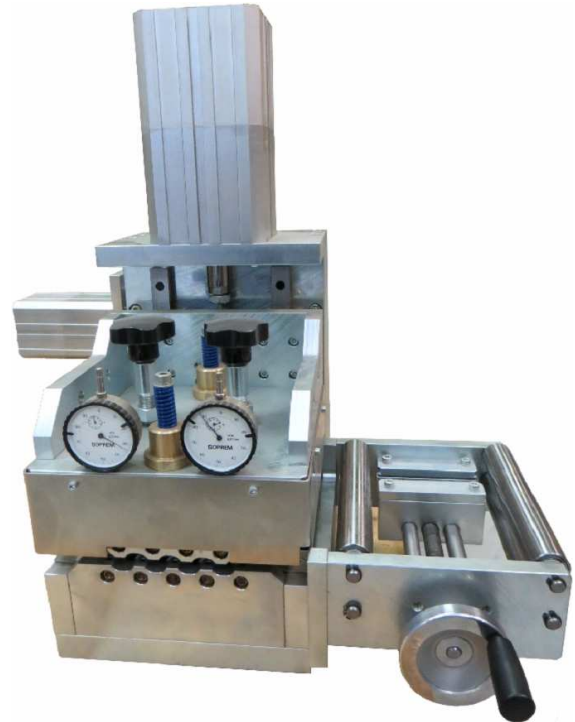

#### Technical data

- |                             |              |
|-----------------------------|--------------|
| - Process flow direction    | right – left |
| - No of straightening rolls | 9 pieces     |
| - Ø straightening rolls     | 25 mm        |
| - Max. strip thickness      | 0.8 mm       |
| - Max. strip width          | 130 mm       |
| - Pneumatic supply          | 6 bar        |

#### Application area

- Machine can be integrated into an accumulation line or usable as independent machine.

#### Execution

- Non painted  
all parts nickel coated

